



## IP67 External Bullet Camera

### Bullet Camera

#### High Sensitivity Camera

The Vidiwave SCC series is a light bullet camera with a high-sensitivity camera for operation in variable mobile light conditions.

It is especially suitable where high-definition colour is important, such as passenger loading and unloading areas in public transport applications. With its IP67 rating, they are the professional choice for external vehicle applications.

#### Extreme Reliability

The ultra-rugged dome housing is designed to be vandal resistant and waterproof and has an IP67 rating.

The aluminium housing protects the camera from damage caused by impact strikes, wear & tear, dust or water ingress. It is both visually appealing and practical, making the Vidiwave SCC camera the professionals' choice for a wide range of vehicle CCTV installations.

#### Optimal Performance

The Camera has 3 mounting collars with different surface angles to ensure the optimal image positioning, enabling excellent video quality whatever the mounting surface or location. Image quality and overall performance is further maximised by a cutting-edge High-Resolution True Day/Night Wide Dynamic Range CCD Module. It delivers maximum performance by combining low-light sensitivity with superb headlight suppression.

Vidiwave prides itself on designing fully integrated cameras that are configured and tested to fully optimize performance. This quality of performance is then fully certified by one of Europe's EMC Test Houses specialized in Automotive, Rail and Marine

#### Certifications

Rail: EMC - EN 50121-2-3 2006  
Automotive: EMC - EC 95/54



#### Key Features

- True Day/Night Camera with Wide Dynamic Range for extreme headlight suppression
- Wide Dynamic Range
- Discreet flush mount
- IP67 Rated - ideal for external vehicle applications
- 3 mounting collars delivers maximum flexibility lens rotation and placement
- High Resolution - 480TVL
- Die-Cast housing and glass lens
- 12VDC Power

CCD Sensor Type	Interline Transfer CCD Effective Pixels PAL 752 (H) x 582 (V) H Resolution
Sensitivity (mm)	Colour 2 Lux
S/N Ratio	>48dB (AGC off)
Video Output Composite	1Vp-p 75Ω
Electronic Shutter	NTSC: 1/60 - 1/100,000 sec PAL: 1/50 - 1000,000 sec Auto
Lens:	Standard 2.8mm F2.0
Option	3.8mm, 6mm, 12mm
Power Consum	100mA 12VDC Operating
Temperature	-10°C - +50°C (relative humidity 95% max)
IP Rating	IP67
Storage Temp	-20°C - +70°C




**IDIWAVE**  
Wireless Mobile Video Solutions

**Vidiwave™ Limited**  
Unit 5, Beaufort Court,  
Roebuck Way, Knowhill  
Milton Keynes, Bucks  
MK5 8HL  
**Web: [www.vidiwave.com](http://www.vidiwave.com)**  
**Tel : +44 (0) 01908 690090**

## IP67 External Bullet Camera

Bullet Camera

### Solution Connectivity Overview

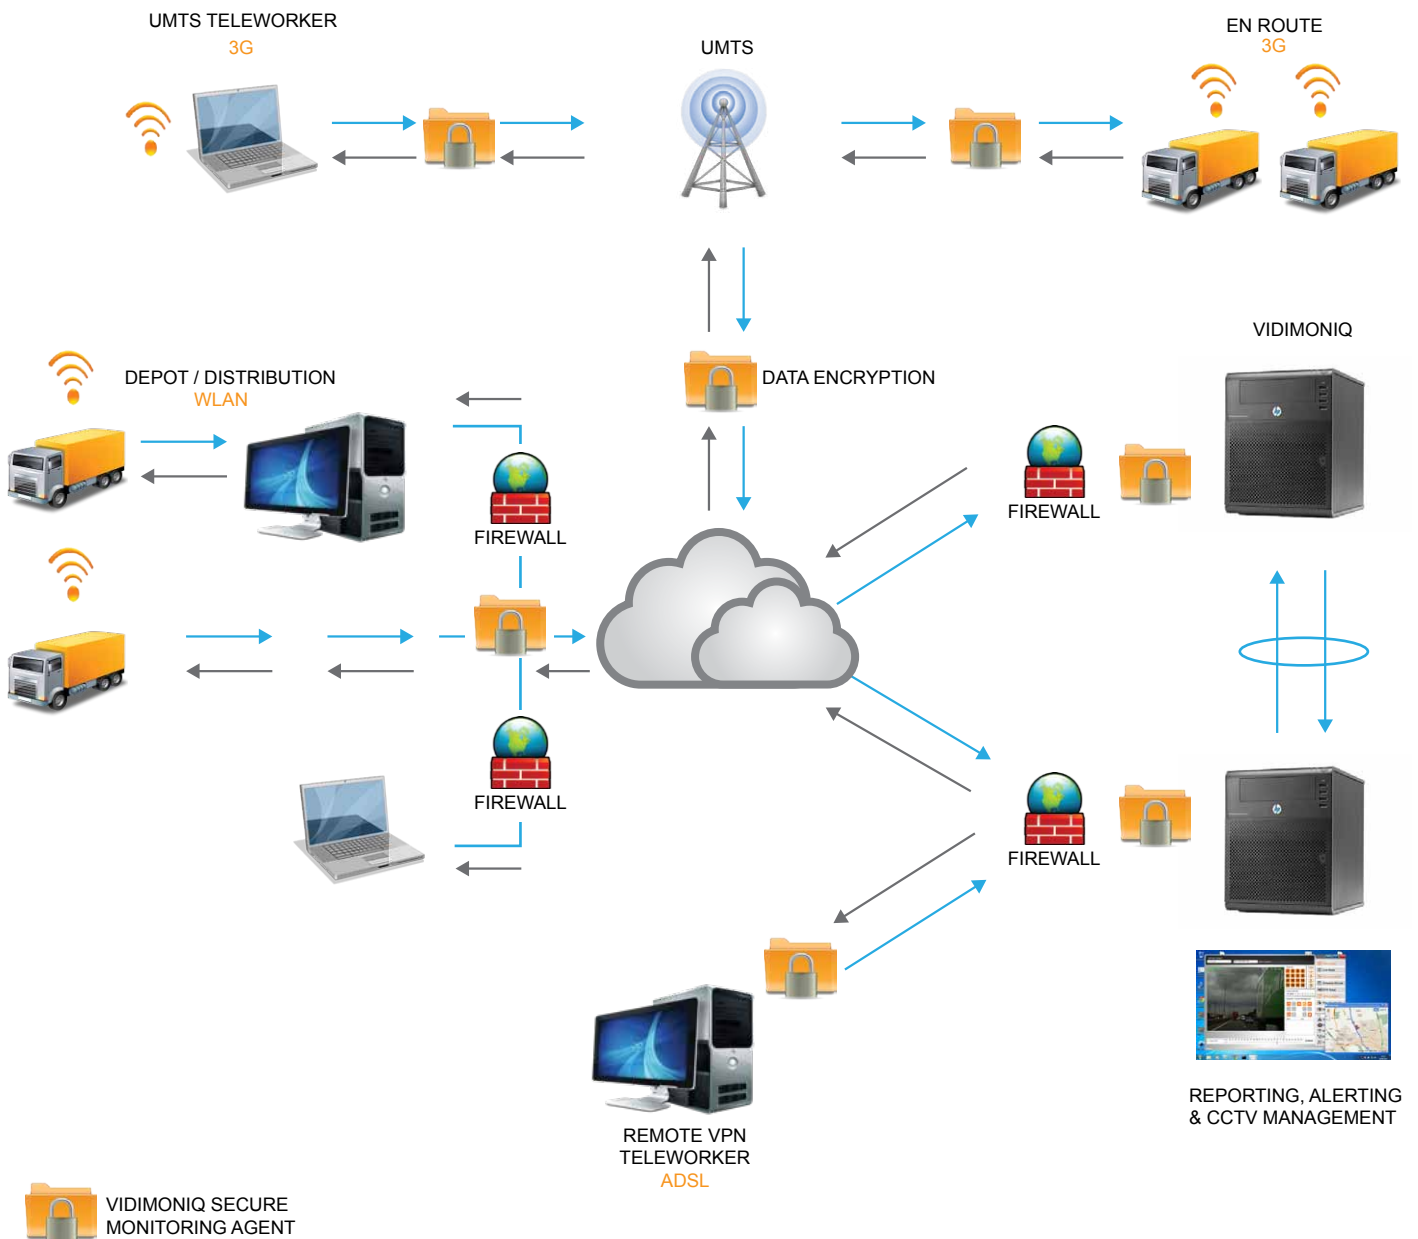

© All Rights Reserved  
Vidiwave Limited, Unit 5 Beaufort Court, Roebuck Way, Knowhill, Milton Keynes  
Buckinghamshire, England - MK5 8HL

Recording Technology | 3G Network | Vehicle Camera Solutions | Cinema Room

[www.vidiwave.com](http://www.vidiwave.com)